

**ALE Series Outdoor Common
Cathode Energy Saving Full Color
Aluminum Screen**

960×960×78mm Specification

Catalogue

Chapter 1 Product Introduction	错误!未定义书签。
Chapter 2 Structural Appearance	3
2.1 Appearance Picture	3
2.2 Technical Parameter	4
2.3 Packing List	6
2.4 Matching Project for Power Supply	6
2.5 Accessories	6
Chapter 3 Interface Definition	7
Chapter 4 Installation.....	8
4.1 Kit Installation	8
4.2 Cabinet Installation	8
4.2.1 Front Installation for Cabinet	9
4.3 Display Installation	10
4.3.1 Diagram for Cable Connection	10
4.3.2 Networking Introductiont.....	10
4.3.3 Installation Method.....	11
Chapter 5 Description for Product Features	12
Chapter 6 User Manual.....	15
Chapter 7 Acceptance Request and Method	16
Chapter 8 case study.....	17

Chapter 1 Product Introduction

- **Common Cathode with Energy-Saving**

Common cathode is an energy-saving power supply technology for LED display, which can effectively solve the problems of high screen temperature and excessive power consumption of common anode circuit. The average temperature of the panel of the common cathode circuit is 15°C lower than that of the traditional common anode circuit, and the power consumption is reduced by more than 20%.

- **Four-level energy-saving technology**

Class I dynamic energy saving: when the signal is not displayed, turn off the driving circuit of the constant current tube chip;

Level II black screen energy saving: when the display screen is completely black, the static consumption current of the chip drops from 6mA to 0.6mA;

Level III full-screen energy saving: when the low level is maintained for 300ms, the static consumption current of the chip drops from 6mA to 0.5mA;

Class IV shunt power supply and step-down energy saving: the current first passes through the lamp bead, and then goes to the negative electrode of the IC, so that the forward voltage drop becomes smaller and the on-resistance becomes smaller.

- **Real color, more realistic picture**

The refresh rate is up to 3840Hz, the high contrast ratio, the grayscale is above 16 bit, the picture is vivid and delicate, the brightness is stable and even, not dazzling or grainy. Red, green and blue three-in-one LED lamp beads, with good consistency, and the viewing angle can reach more than 140°.

- **Structure optimization, flexible installation**

It supports various installation methods such as floor-standing, hoisting, and wall-mounted. Modular design of module, box and power box, front and rear maintenance, hard connection, no structural installation, saving structural cost.

- **Driving Project**

Self-designed electronic circuit engineering board, double row tube, 32 capacitors, It has the function of list up and down hidden, high refreshing ratio, dark dot amended in first line, low grayscale amended, color cast and spot amended, etc.

- **Stable and high protection**

Outdoor application products, IP66 protection grade, integrated all-aluminum design, with corrosion resistance, high melting point, flame retardant and fire resistance, moisture resistance and salt spray resistance, working temperature -40 °C -80 °C, can operate normally in the seaside environment for a long time, The ability to adapt to the environment is very strong, and it can work outdoors all day long.

- **Stable and reliable performance**

Ultra-low temperature rise, low power consumption, low attenuation, and the good thermal conductivity of the aluminum module itself, make the heat dissipation effect of the whole screen better, no need to install air conditioners, high reliability and long service life.


Chapter 2 Structural Appearance

2.1 Structural Appearance

Picture2-1 Appearance Picture-Display Module(480*320*15mm)



Picture 2-2 Appearance Picture-Profile Aluminum Cabinet(960*960*90mm)

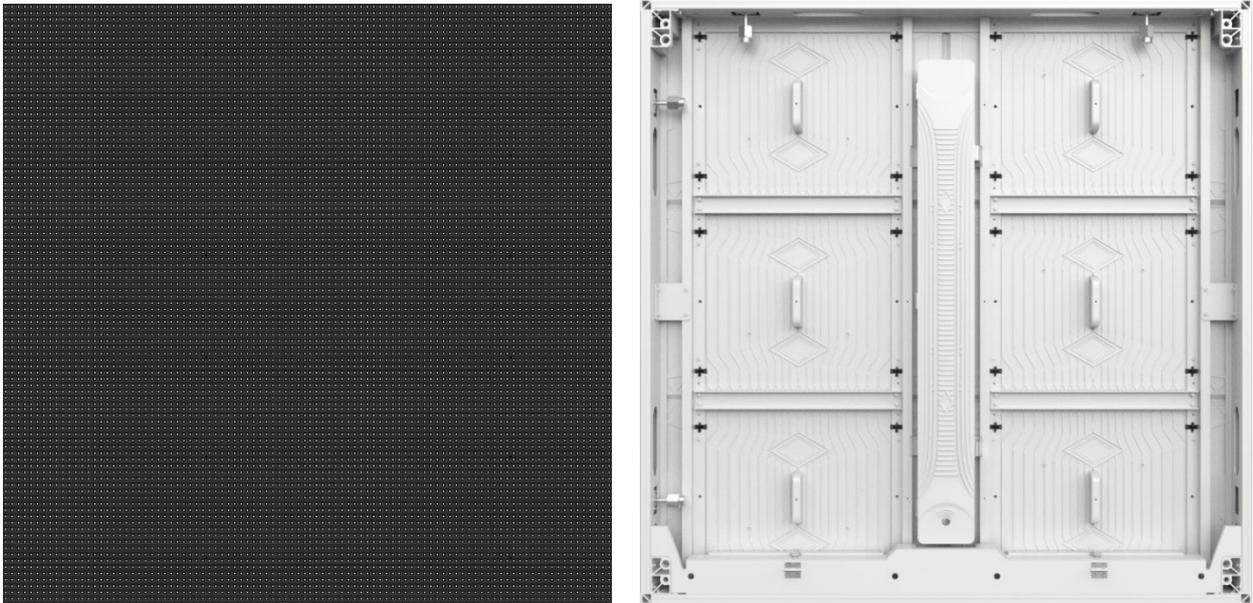

2.2 Technical Parameters

Model	ALE series	ALE series	ALE series	ALE series	ALE series
Pixel Pitch (mm)	4.4	5.7	6.67	8	10
Pixel Composition (SMD)	1921	2727	2727	2727	3535
Module Resolution (W×H)	108*72	84*56	72*48	60*40	48*32
Module Size (mm)	480*320*15				
Module Weight (Kg)	2				
Module Qty/Cabinet	2*3				
Cabinet Size (mm)	960*960*78				
Cabinet Resolution (W×H)	216*216	168*168	144*144	120*120	96*96
Cabinet Area (m ²)	0.92	0.92	0.92	0.92	0.9216
Cabinet Weight (Kg)	26.5				
Cabinet Material	Aluminum profile				
Cabinet Density (dot/m ²)	50625	30625	22500	22500	10000
IP Rating	IP66				
Single Dot Brightness adjustment	Yes				
Single Dot Color adjustment					
White Balance Brightness (cd/m ²)	5000	5500	6500	6500	7000
Color Temperature (K)	6500-9000				
Visual Angle (H/V)	160°/140°				
Contrast Ratio	8000:1	17000: 1	17000: 1	17000: 1	18000: 1
The Max Power Consumption (W/m ²)	450				
Average Power Consumption (W/m ²)	150				
Input Voltage (V)	110-240				
Working Voltage (V)	DC3.8+DC2.8V				
Maintenance way	Front and Rear				
Frequency	50&60	50&60	50&60	50&60	50&60
Scan number (Constant Current)	1/9s	1/7s	1/6s	1/2s	1/2s
Grayscale	65536				
Refreshing rate (Hz)	3840				
Color Processing	14-16bit				
Lifespan to 50% brightness (h)	100000				

Work Temperature/Humidity	-10°C-50°C/10%RH-98%RH (Non Condensing)
Storage Temperature/Humidity	-20°C-60°C/10%RH-98%RH (Non Condensing)
Signal input	DVI HDMI or other

Remarks: the cabinet can do aluminum die casting with standard 960*960mm cabinet, or can use aluminum profile to do customized size such as W960*H640mm, W1440*H960mm,



2.3 Packing List

Table 2-3 Packing List

Packing List	Quantity	Unit
LED Display	1	Set
User Manual	1	pcs
Approved Certificate	1	pcs
Warranty Card	1	pcs
Construction Notification	1	pcs

2.4 Power Supply Configuration Project

Table 2-4 Supply Configuration Project

Power Supply	Configuration Project
300W/400W Power Supply	Can load 3pcs modules

2.5 Accessories

Table 2-5 Accessories List

Accessories	Name	Picture
Assemble Accessories	Power Supply、Single Cable	
	Screws、connecting sheet	
	Sleeve Piece、Key、T-type equipment for front and rear maintenance	

Chapter 3 Interface Definition

Picture 3-1 Interface Picture (HUB75)

1↻	2↻
3↻	4↻
5↻	6↻
7↻	8↻
9↻	10↻
11↻	12↻
13↻	14↻
15↻	16↻


Table 3-1 Interface Definition

Pin	Signal	Function	Pin	Signal	Function
1	R1	Red Data Signal	2	G1	Green Data Signal
3	B1	Blue Data Signal	4	GND	Power Ground
5	R2	Red Data Signal	6	G2	Green Data Signal
7	B2	Blue Data Signal	8	E	Row Decoding Signal
9	A	Row Decoding Signal	10	B	Row Decoding Signal
11	C	Row Decoding Signal	12	D	Row Decoding Signal
13	CLK	Clock Signal	14	LAT	Latch Signal
15	OE	Enable Signal	16	GND	Power Ground

Chapter 4 Installation


4.1 Kit Installation

Table 4-1 Hole Installation Diagram for Kit

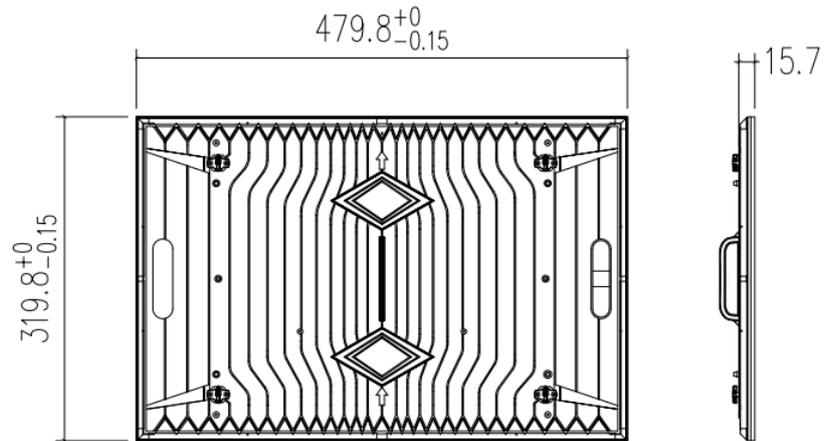


4.2 Cabinet Installation

Picture 4-2 Hole Installation Diagram for Kit

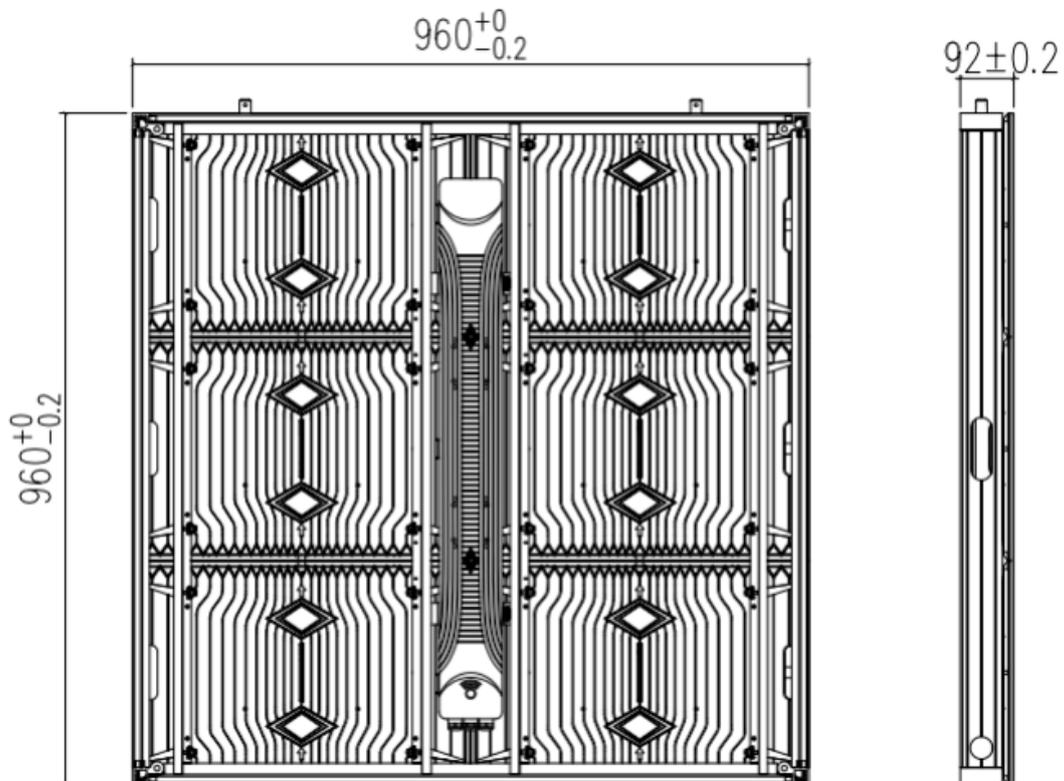

4.2.1 Front Installation for Cabinet

Picture4-3 Components for Cabinet Installation

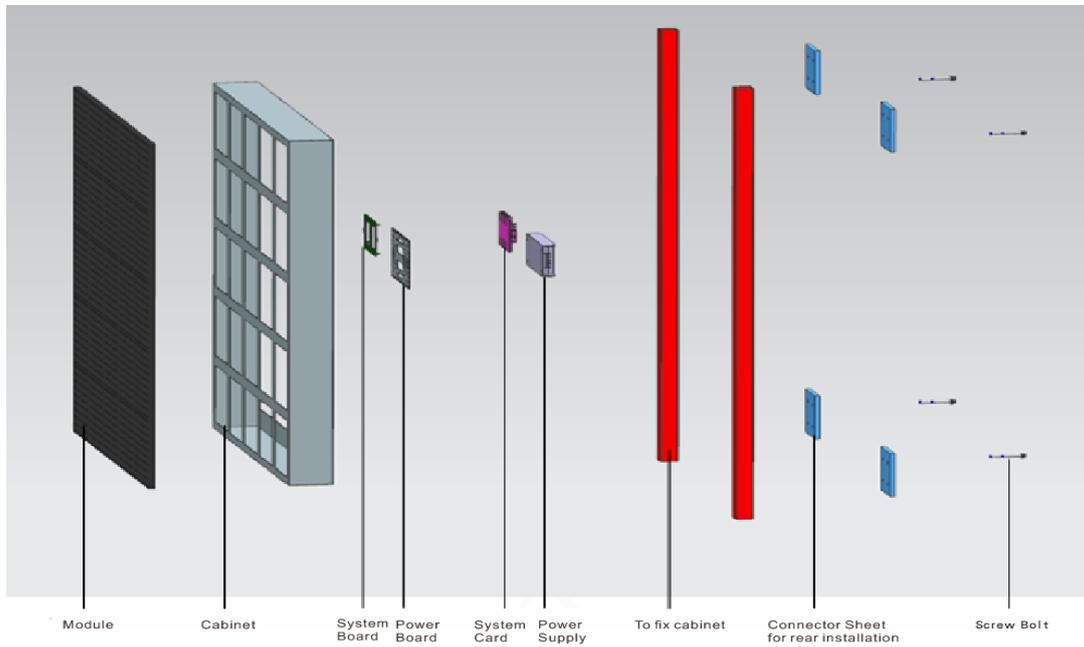


Picture 4-4 After finishing to install for cabinet



4.3 Display Installation


4.3.1 Diagram for Cable Connection

Picture4-5 Diagram for Connection




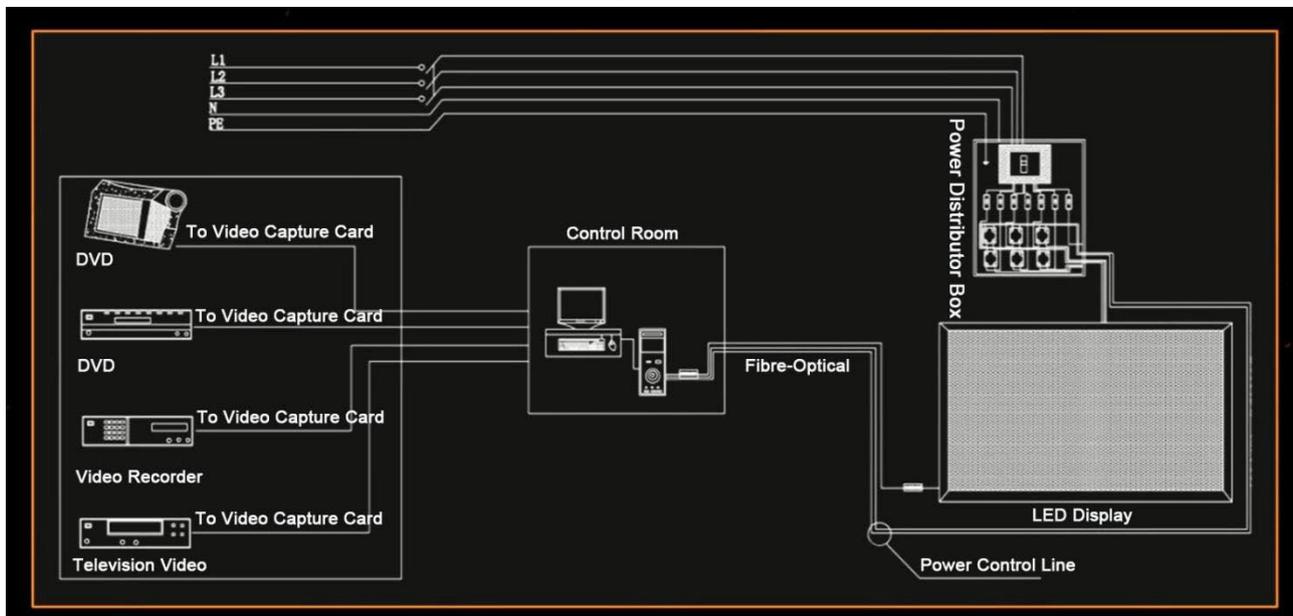


4.3.2 Networking Introduction

Picture4-6 Topographic Picture for networking

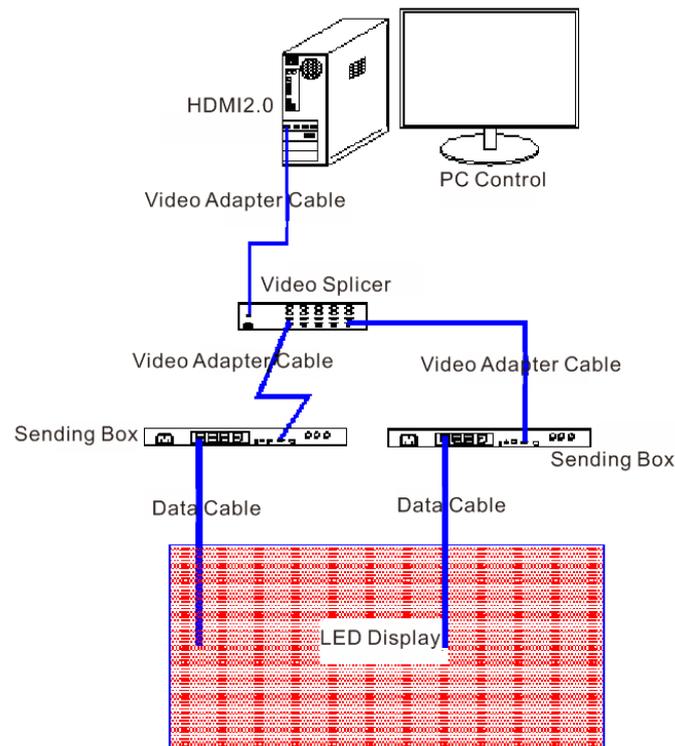


4.3.3 Installation Method

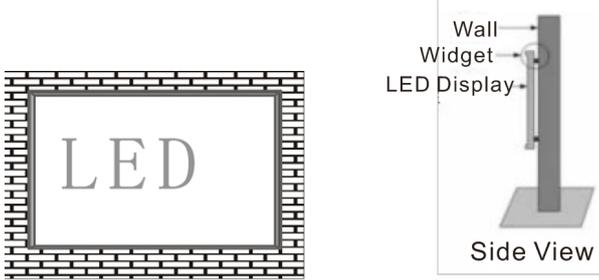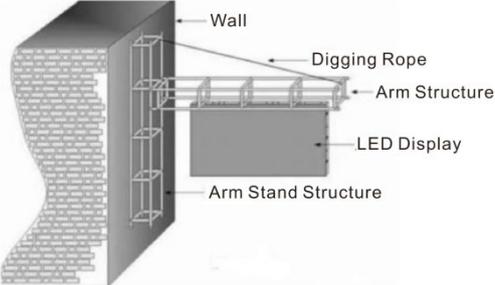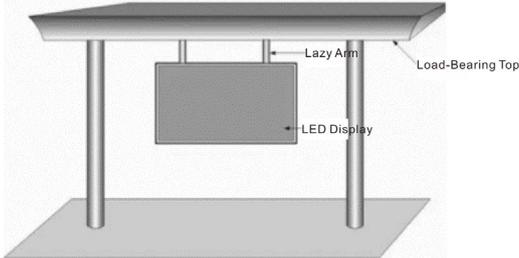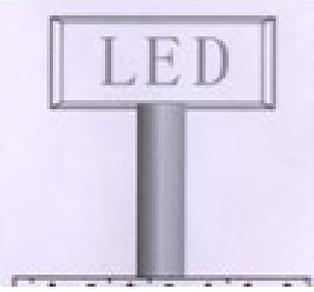Installation Type	Picture
<p>Wall Mounted Installation</p>	 <p>The diagram shows a brick wall with a rectangular LED display mounted on it. To the right, a 'Side View' diagram shows a vertical 'Widget' attached to the 'Wall' with the 'LED Display' mounted on the widget.</p>
<p>Floor Mounted Installation</p>	 <p>The diagram shows a brick wall with a rectangular LED display mounted on it. To the right, a cross-section diagram shows the 'LED Display' mounted on a 'Fixed Steel Frame and Rim' which is attached to a 'Load-bearing Wall'.</p>
<p>Cantilever Type Installation</p>	 <p>A 3D cutaway diagram showing a cantilever installation. Labels include: 'Wall', 'Digging Rope', 'Arm Structure', 'LED Display', and 'Arm Stand Structure'.</p>
<p>Hanging Type Installation</p>	 <p>The diagram shows a hanging type installation where an LED display is suspended from a table-like structure. Labels include: 'Lazy Arm', 'LED Display', and 'Load-Bearing Top'.</p>
<p>Upright Type Installation</p>	 <p>The diagram shows an upright type installation with an LED sign mounted on a tall, vertical cylindrical post.</p>

Chapter 5 Description for Product Features

5.1 New added vent valve

For the ALE series of LED display, a vent valve has been added to the bottom of the power box, which can adjust the internal gas pressure, reduce the temperature rise after recoil, and balance the internal environment.

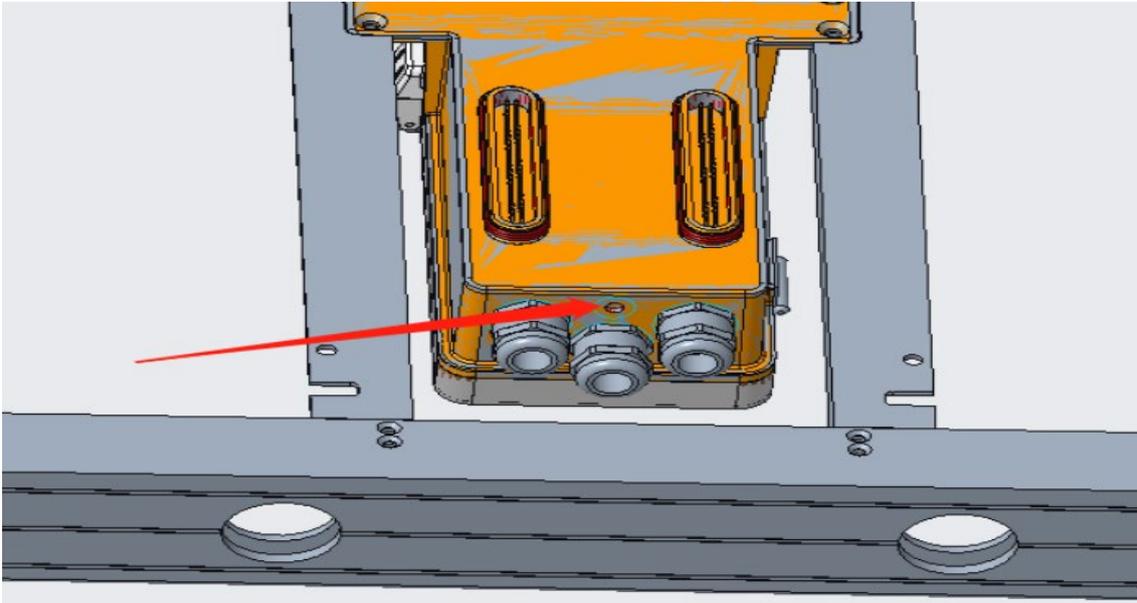

5.2 Strong Adaptability for outdoor environmental condition



it can normal work
under environment
temperature of 80°C



5.3 Structural cableless HUB Link, Wireless Design.

The product structure is using HUB link, wireless design, its appearance is tidy and beautiful.



5.4 Aluminum Profile Cabinet, Lightweight, Safety and Reliability, No Distortion.

ALE series of LED display is to adopt aluminum profile cabinet, the weight of single cabinet is just 24.5KG, display module is die-casting aluminum material, it is fire resistance, no distortion even it is under the high environmental temperature.



Chapter 6 User Manual

Table 5-1 Notification

Item	Notification
Temperature	Keep the work temperature within -10°C~50°C
	Keep the storage temperature within -20°C~60°C
Humidity	Keep the work humidity within 10%RH~98%RH
	Keep the storage humidity within 10%RH~98%RH
Waterproof	IP66
Dust-proof	IP66
Anti-Electromagnetic radiation	LED display shouldn't put under the environment where has strong interference by electromagnetic radiation, which would be easy to picture display abnormal.
Electrostatic Prevention	It should be ground connected well for power supply, cabinet, mental cover of display body, the resistance of ground connection<10Ω, to avoid making any damage to electric components.

User Manual

Item	User Manual
Electrostatic Protection	The installer need wear electrostatic ring and electric gloves, each equipment should take ground connection well when installing.
Connection Type	There are positive and negative electrode silk printed on module, don't allow to reverse connect, and prohibit to connect with AC 220V.
Operate Type	Prohibit to assemble module, cabinet and whole of display under power on, operation should be under power off completely, to protect personal safety; Prohibit anyone to touch when the LED display is working, in case the static electricity which is generated by body to break through LED and other components.
Dismantle and Transportation	Don't allow to throw, push, compress module, to prevent module falling down, to avoid breaking kit, damage LED chips, etc.
Environmental Inspection	It should match temperature and humidity meter for LED display at installation site, to monitor its surrounding environment, so that it can find out if LED display being affected with damp, moisture, etc.
The Usage of LED display	The environmental humidity should be 10%RH~65%RH, it is suggested to turn on LED display one time each day, normal to use above 4 hours each time, to remove its damp.
	When the environmental humidity is above 65%RH, it should make dehumidification to environment, and it is suggested to work LED display above 8h each day.
	When LED display has not turned on for a long time, it should preheat LED display to remove moisture before use, to avoid damage LED because of damp, the specific method: 20% brightness to work for 2h, 40% brightness to work for 2h, 60% brightness to work for 2h, 80% brightness to work for 2h, 100% brightness to work for 2h, by this to gradually increase its brightness.

Chapter 7 Acceptance Request and Method

Table 6-1 Acceptance Request and Method for LED display

Item	Acceptance Request and Method
Brightness of LED Display	Switch LED display to work as full brightness, use light-gun to measure the brightness of LED display within 10 minutes. When measuring its brightness, the light-gun need be vertical to LED display, to adjust the distance of light-gun and LED display, ensure the view window, black area, cover above 16 pixels, adjust focal length, to ensure LED chip being able to clearly view in eyepiece, then measure and record brightness data.
Visual Angle	The one should stand on the angle of 140° , bottom angle 65° to LED display when making measurement, it is requested that LED display should not have obvious the problem of dark block.
<p>The diagram consists of two parts. The left part shows a horizontal rectangle labeled 'LED Display'. A horizontal dashed line passes through the center of the rectangle. Below the rectangle, two lines labeled 'Sight Line' originate from a single point and extend upwards to the bottom corners of the rectangle, forming an angle of 140° at that point. The right part shows a vertical rectangle labeled 'LED Display'. A horizontal dashed line extends from the top-right corner of the rectangle to the right. A line labeled 'Sight Line' originates from the same top-right corner and extends downwards and to the left, forming an angle of 65° with the horizontal dashed line.</p>	

Chapter 8 case study


It is widely used for various of outdoor application fields, such as the exterior wall of building, Hanging Garden, Government Cultural Plaza, Bus Station, Vertical Advertising aside road, etc.




Zhengzhou University double-sided aluminum screen (220m²)



Jiangyin Gymnasium Aluminum Screen (280m²)

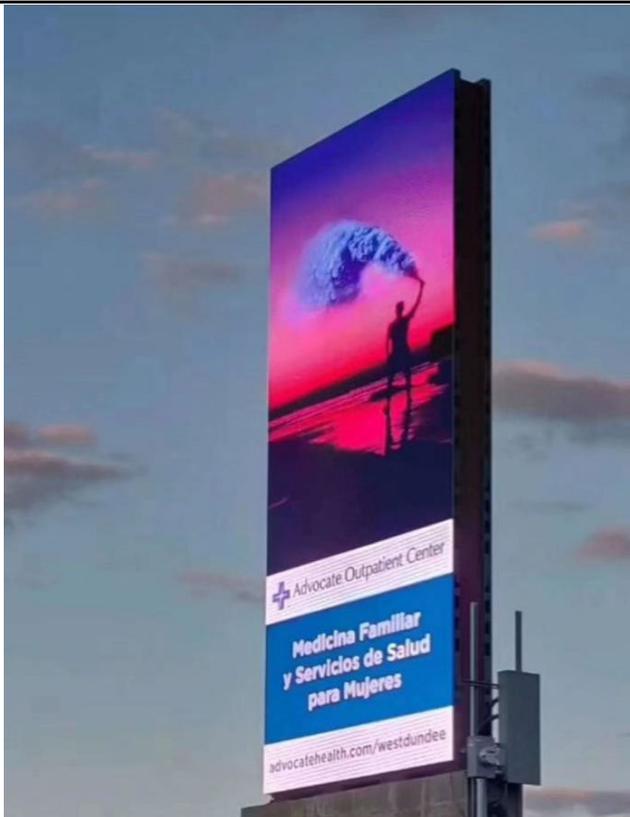

Double-sided aluminum screen in Houston, USA (180m²)

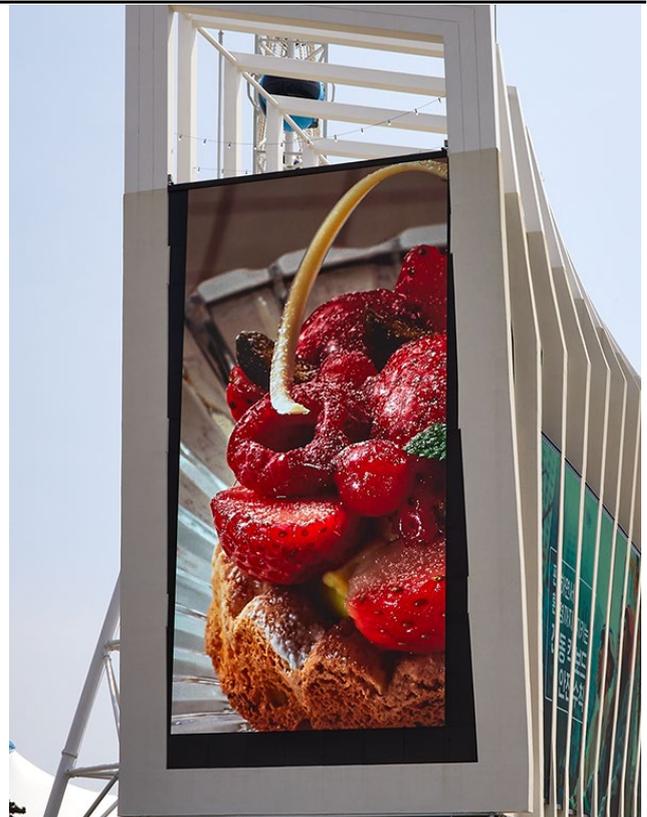

Aluminum screen on the west side of Sokcho Coast, Gangwon-do, South Korea (90m²)



Aluminum screen on the south side of Sokcho coast, Gangwon-do, South Korea (150m²)